



The Clear Choice
Water Filtration Systems

www.aquafilter.com

H10A series

10" filter housing



Made in EU

General Description:

AQUAFILTER H10A (EG14WWAQ-4 and EG14CWAQ-4) filter housings - 10"-type filter housings offer the versatility to meet all customer filtration needs.

EG14WWAQ-4 and **EG14CWAQ-4** are dedicated for cold water filtration.

EG14WWAQ-4 and **EG14CWAQ-4** housings are compatible with a broad range of 2 1/2" x 10" type cartridges widely available on the market.

EG14CWAQ-4 filter housing consists of: a transparent sump and head with 1/4" inlet/outlet thread. A transparent cover allows for the evaluation of cartridge contamination. **EG14WWAQ-4** filter housing consists of: a white sump and head with 1/4" inlet/outlet thread.

The design in combination with two O-rings (one inside filter head and second on the edge of filter sump) ensures maximum leak proof performance and ease of filter cartridge replacement.

The **H10A** series housings can be mounted individually or connected in a series. They can be used to build RO and Under-counter filtration systems.

The **EG14WWAQ-4** and **EG14CWAQ-4** housings were tested and certified by **NSF** for structural integrity and material requirements.



EG14CWAQ-4 1/4"

EG14WWAQ-4 1/4"

Features:

- High quality
- Competitive Pricing
- NSF certified for structural integrity and material requirements
- FDA CFR Title 21 Compliance
- Factory Tested
- Two O-rings for maximum leak proof protection
- Can be installed in a row configuration
- Compatible with most 10" filter cartridges available on the market
- Made in EU with High Performance Components

Applications:

- RO filtration systems
- FP2 and FP3 filtration systems
- Other application



This Cartridge is Tested and Certified by NSF International against NSF/ANSI Standard 42 for materials requirements only.

COMPONENT






The Clear Choice
Water Filtration Systems

www.aquafilter.com

H10A series



10" filter housing

Additional accessories

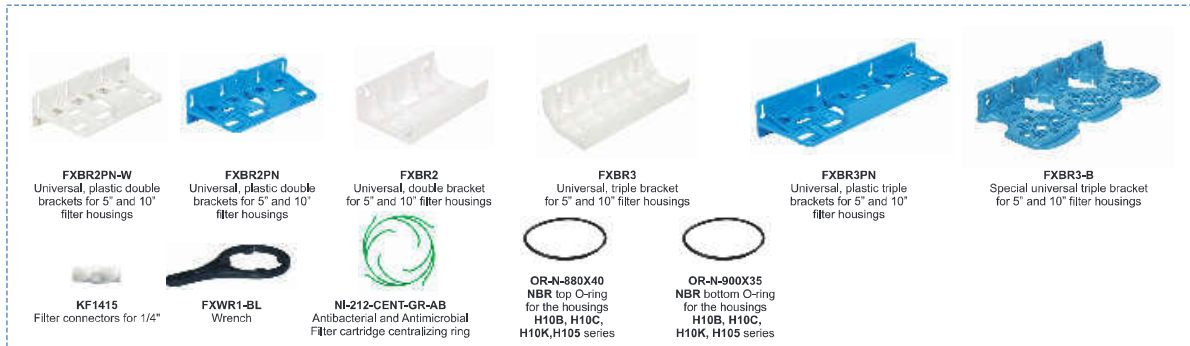

Specifications:

Clear Housing (sump): poly(ethylene terephthalate) (PET)
White Housing (sump): polypropylene
Cap: polypropylene
O-ring: NBR
Number of Orings: 2
Thread: 1/4" NPT
Operating Pressure: 6 bar (90 psi)
Minimum Temperature: 2°C (35°F)
Maximum Temperature: 23°C (73,4°F)
Dimensions (H x OD): 293 x 115 (mm)
Cartridge dimensions: 9 7/8" x 2 1/2" (250 mm x 65 mm)

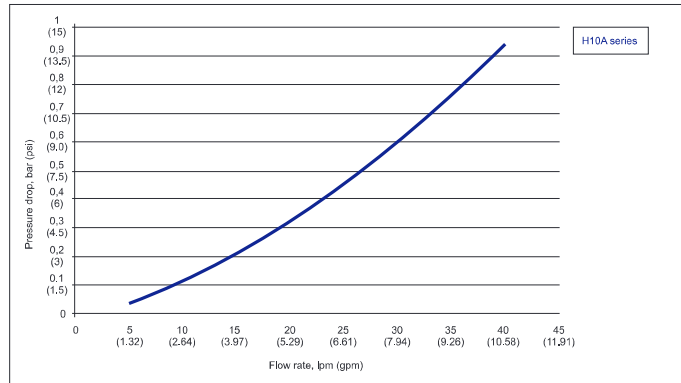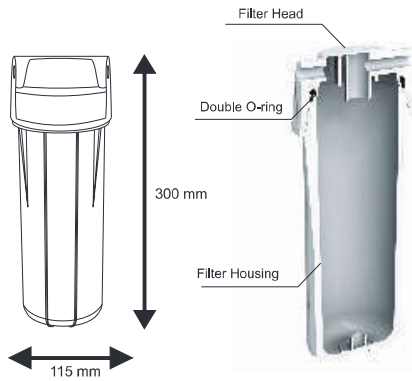

NOTE

- Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.
- Water filtration systems can help reduce the presence of contaminants. In addition, some water filtration systems can help reduce the presence of microorganisms or other contaminants with potential health effects.
- We strongly recommend regularly scheduled maintenance and replacement of the filter cartridge in order for the product to perform properly.
- Replace the filter cartridge at least every 3 or 6 months (depending on water quality and water consumption)

LIMITED WARRANTY: Manufacturer warrants that this product is free from defects in materials and workmanship. This warranty, together with any and all warranties implied by law, shall be limited to a period of five (5) years from the date of original purchase.

This limited warranty does not apply to failures that result from abuse, misuse, alteration or failure to properly comply with installation, or cartridge change instructions.

We strongly recommend adding to all point of use and point of entry a Pressure Limiting Valve to guard against unwanted extreme water pressure events pressure increases, surges, and water hammer which could occur in the water pipes. Not having one installed could mean that if you ever did have to claim damage caused by a burst water filter system, the claim will be denied.

All Aquafilter images, trademarks, logos, and other intellectual property are the sole and exclusive property of Aquafilter, Inc. and may not be used without our express written permission.

Aquafilter Manufacturing Facility

Aquafilter Inc.
Hunt Valley 21030, USA
us@aquafilter.com

Aquafilter Germany
15234 Frankfurt, Germany
de@aquafilter.com

Aquafilter Europe
91-222 Lodz, Poland
pl@aquafilter.com

