

## INSTALLATION & OPERATION INSTRUCTIONS



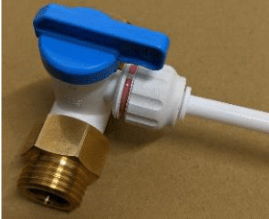

### TWIST-FIT CONNECTIONS

Pearl Filtration Pty Ltd shall not be held liable for any damages whatsoever resulting from the use or installation of this product, regardless of the cause (including, but not limited to, material defects or workmanship). Installing, operating, or utilising this product in any way indicates the Buyer has read and accepted this statement and our Terms & Conditions of Trade, available to view on our website: [pearlfiltration.com.au/shop/terms-conditions/](http://pearlfiltration.com.au/shop/terms-conditions/)


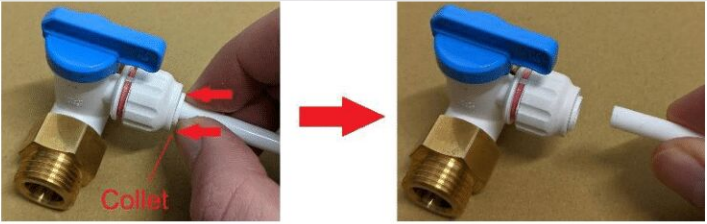
**Warning:**     This product is designed for indoor use, with town water of ambient temperature. Do not use this product with water that is microbiologically unsafe or declared not fit for drinking.

Max. operating pressure = 10 Bar (150 psi), at ambient water temperature.  
 All plumbing works should be carried out by a licenced plumber.

**To Insert the Tube:**

<b>Step 1.</b>	Cut the tube to the desired length. Ensure the cut is straight, clean and free from burs	
<b>Step 2.</b>	Ensure the screw cap is in the open position (the red-coloured ring will be visible)	
<b>Step 3.</b>	Insert the tube, pushing it as far in as the fitting will allow	
<b>Step 4.</b>	Twist the screw cap clockwise, until the red-coloured ring is totally concealed	
<b>Step 5.</b>	Ensure the tube is properly secured in the fitting by gently pulling back on the tube	
<b>Step 6.</b>	Test the system and monitor for leaks. If leaks are present, repeat Steps 1-5, taking particular care to check the tube is cut straight, pushed fully into the fitting and the red-coloured ring is totally concealed	

**To Remove the Tube:**

<p><b>Step 1.</b> Twist the screw cap anti-clockwise to reveal the red-coloured ring</p>	
<p><b>Step 2.</b> Push the collet in while simultaneously pulling the tube out</p>	

**– End of Installation Instructions –**